

Always. Reliable. Tight.


Spiral hose

Hateflex 14090

Article no.: xxx



- **Pressure-tight flexible empty conduit system (external pressure 2.5 bar) with a smooth inner surface for gentle cable draw-in**

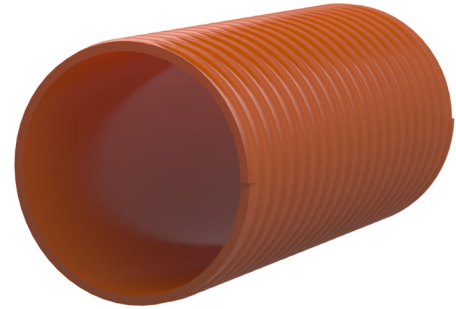

Flexible and very stable cable duct with a smooth inner surface for gentle cable draw-in. A pressure-tight cable entry system can be created with the associated connection components.

FACTS

Advantages:

- High mechanical load capacity and flexibility
- Empty conduit route without sleeve available up to 25 m
- Empty conduit system can be built over

Scope of delivery:

- Coils in lengths of 25 m (special lengths are available in 0.5 m sections)

Dimensions:

- ID: 90 mm

Properties:

- Inherently stable and non-buckling
- Abrasion-resistant
- Weatherproof and will not rot
- Resistant to brine and seawater
- Resistant to many chemicals
- Installation temperature +5°C to +50°C

Material:

- Hard PVC/soft PVC

Tightness:

- Gastight and watertight to 2.5 bar

